


CMI's **New** *EquiBond*® Grid System

Equipotential Bonding Grid System

Used underneath the paved surface 3' out from inside edge of pool.

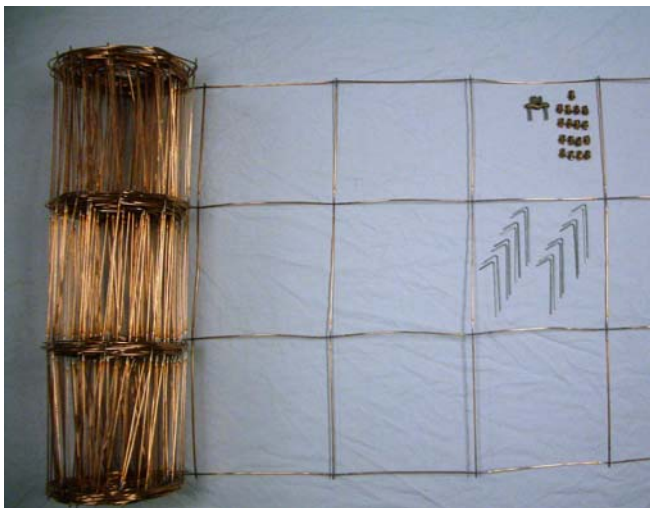

Accessory Kit Includes:

- 1 JRD Rebar clamps (Each clamp is UL Listed for 2 # 8 Bond wires)
- 13(or17) #8 Split Bolts (to connect four corners and secure each side to the Rebar Clamp for Direct Burial)
- 16 Metal Stakes (Holds grid in Place so one person can roll it out)

Everything Included! All you need to install the equipotential bonding grid! Can be installed by 1 person. **FAST!**

Save with Copper *EquiBond*® Grid System

EquiBond® Grid System comes in two sizes: **2' x 100' roll (part # EB2100)**, and **3' x 100' roll (part # EB3100)**. All made from exothermically welded #8 Solid Copper, 12" spacing on grid. Each roll comes with accessory kit above, and can be installed by one person. When using a 12" Beam on pool edge, the 2" wide roll provides a total of 3' from edge of pool. When less than a 12" beam is used, the 3' wide roll is required.

Meets section 680.26(C) of the NEC®

NFPA, National Fire Protection Association, National Electrical Code® and NEC is registered trademarks of the National Fire Protection Association, Quincy, MA
Equibond is a registered trademark of Consolidated Manufacturing International, Raleigh, NC