

**A product improvement so significant,
there was only one name we could give it...**


UltraGrip™ for Pool/Spa 635P




Thixotropic Viscosity. It's what sets UltraGrip Blue Solvent Cements apart from all the rest.

"Thixotropic" is a chemistry term that means a liquid has a unique property. When it's still it looks and acts thick. But it's not just thicker; when stirred it becomes more fluid. What a great property for a solvent cement!

UltraGrip Solvent Cements stay on your dauber or brush better (less drips). They then spread on more smoothly than ordinary solvent cements and stay where they're put (less mess). And, because they stay where they're put, you get an even coating on pipe and fitting with no heavy deposits so you get a better bond (less gaps). And, because it's Thixotropic, you have more working time—the time after you've applied the cement and before the pipe is inserted into the fitting.



Ordinary solvent cement is thin and runny.



UltraGrip is Thixotropic! So it has less drips.


UltraGrip for Pool/Spa, a state-of-the-art product specially formulated to meet the demands of the pool and spa industry, contains AquaShed™, a unique ingredient that actually helps shed water from the welding surfaces.

Time is money. Why come back the next day to pressure test if you can do it as soon as the job is completed?

UltraGrip for Pool/Spa is fast-setting. Pressure testing can be done at completion of job eliminating returns to the jobsite. Our torture test proves it.

Plus UltraGrip for Pool/Spa has all these other important features:

- No primer is needed.†
- Pipeburn is no longer a problem. Solvent evaporates quickly to eliminate heavy deposits of cement.
- Blue dye lets you see what you apply then fades quickly in sunlight for improved appearance.**
- Reduces shrinkage factor. Contains extra PVC resin, partially filling gap between fittings and pipe. Meets or exceeds requirements of ASTM-D-2564.
- For welding Schedule 40 and 80 PVC through 8 inch diameter.*
- Suitable for bonding PVC flex to rigid.*
- Reduced thickening in can on hot days.

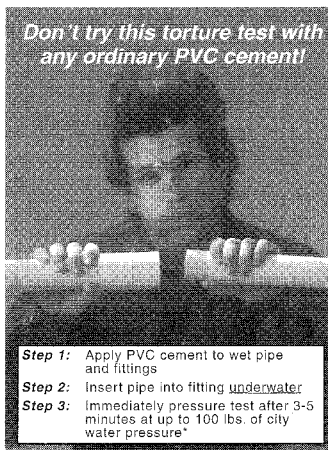

*IMPORTANT NOTE: Immediate pressure testing relies on an interference fit between pipe and fitting. Due to the non-rigid nature of flex pipe, immediate pressure testing is not recommended or guaranteed. UltraGrip for Pool/Spa may be used when normal PVC cement cure times (12 to 36 hours depending on weather, pipe diameter and other variables) are allowed prior to application of pressure.

**Blue color will fade quickly in high intensity sunlight for improved appearance. This will take several weeks in low-intensity sunlight.

†Check state and local requirements in your area before installation.

Our warranty is limited to replacement of defective merchandise.

WARNING: All of the products listed herein are extremely flammable and harmful or fatal if swallowed – see specific cautions on container. Check with state and local authorities for proper disposal of contents and container. For emergency response, contact 1-800-357-0036. Prolonged container contact with direct flames will result in seam failure. If exposed, remove as soon as possible.